

entone[™]

Configuring the Tivo for Use With Entone's Hydra HD

Setup Guide

COPYRIGHT

©2007 Entone, Inc. All rights reserved. This document contains proprietary information protected by copyright. No part of this publication may be reproduced, stored in a retrieval system, or transmitted in any form or by any means, electronic, mechanical, photocopying, recording or otherwise, without the prior written consent of Entone, Inc., 2755 Campus Drive, Suite 235, San Mateo, CA 94403. U.S.A.

DISCLAIMER

IF THIS PRODUCT DIRECTS YOU TO COPY MATERIALS, YOU MUST HAVE PERMISSION FROM THE COPYRIGHT OWNER OF THE MATERIALS TO AVOID VIOLATING THE LAW WHICH COULD RESULT IN DAMAGES OR OTHER REMEDIES.

TRADEMARKS

Entone and the tagline "Connecting the Home" are trademarks of Entone, Inc. All other trademarks or registered trademarks belong to their respective owners.

CHANGES

The material in this document is for information only and is subject to change without notice. While reasonable efforts have been made in the preparation of this document to assure its accuracy, Entone, Inc. assumes no liability resulting from the use of the information contained herein.

Entone, Inc. reserves the right to make changes in the product design without reservation and without notification to its users.

P/N: TBD

CUSTOMER SUPPORT AND CONTACT INFORMATION

For Customer Support please call: 650.572.7000

Customer Contact Information:

Entone, Inc. 2755 Campus Drive Suite 235 San Mateo, CA 94403


U.S.A.

Tel: 650.572.7000

www.entone.com

Entone HydraHD Advanced Setting for Channel Changing with TiVo IR Control


Step 1 Use the Entone's remote control, press "INPUT" and then "MENU" in sequence within 1 second. This will allow you to enter into the user menu, under **TiVo IR KeyCode** select **MAGNAVOX 10024-B** or **CENTURION 00092-B**. Then select **SUBMIT** > **EXIT**.

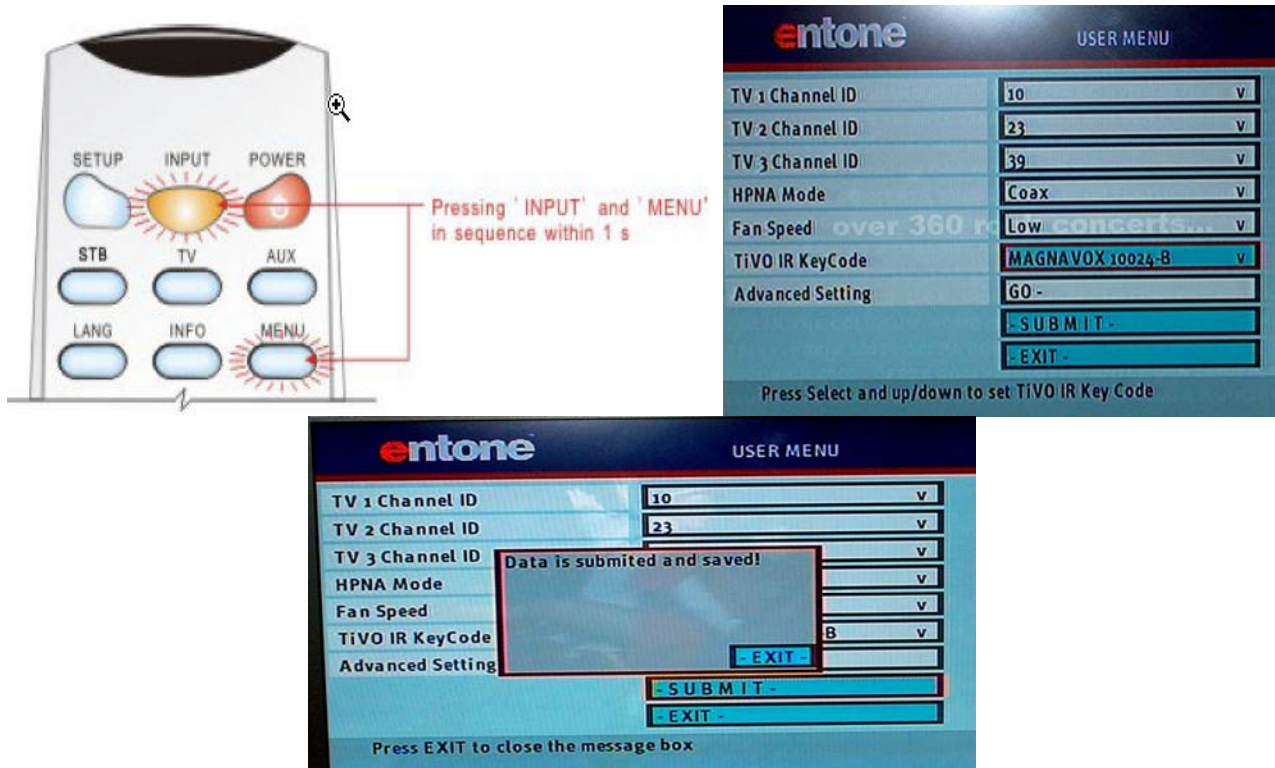


Step 2 Go to **TiVo Channel Changing** screen. From **TiVo Central**; select **Messages & Setting** > **Setting** > **Channels** > **Channel Changing**.




Step 3 Select **No, I've switched to a different cable box**.

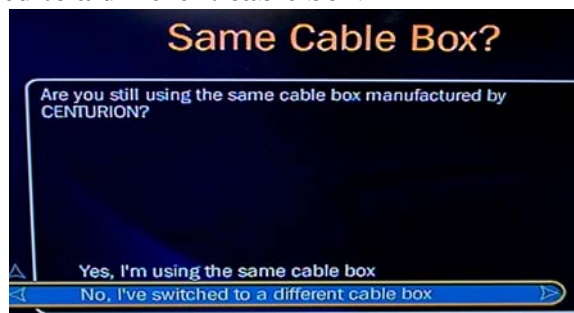


Step 4 Select **MAGNAVOX** or **CENTURION** (the brand that selected in Step1 from Entone User Menu need to be match with TiVo selection below).

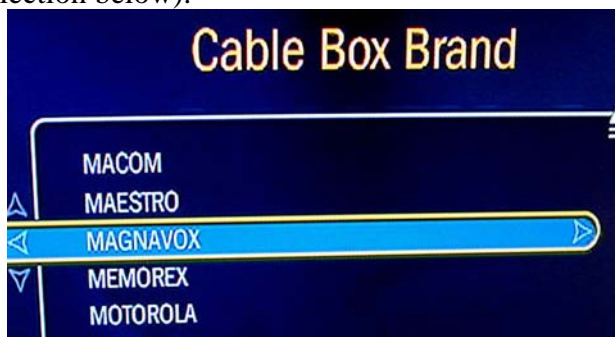


Step 5 Make sure the IR cable is connected to the Hydra properly (please refer to the Tivo documentation for proper connection) and select **OK, I'm sure the IR cable is hooked up correctly**.

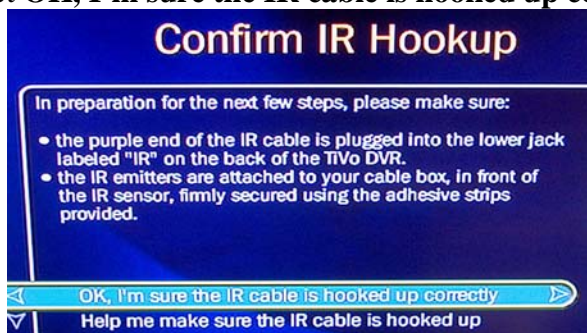


Step 6 Select “005” (typical for digital cable)

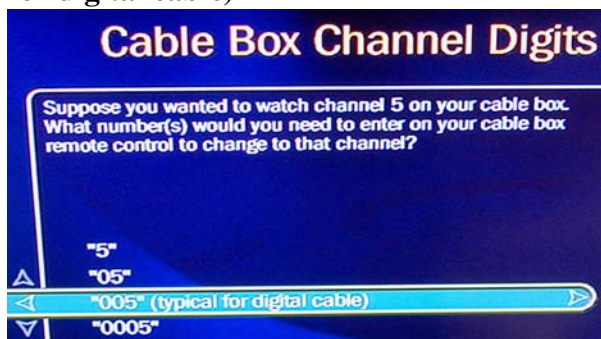


Step 7 Select **NO** (typical) for “Enter” Button.

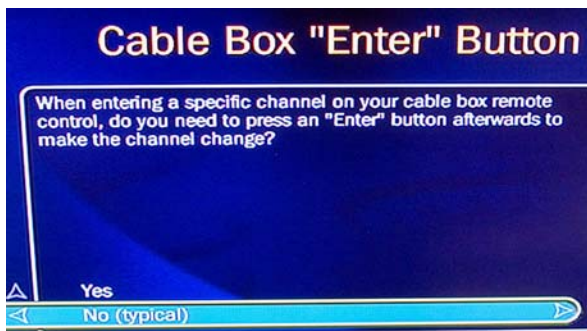


Step 8 On the TiVo remote, press the following keys in order: **THUMBS UP > THUMBS DOWN > PAUSE > PLAY**
* You should hear 5 rings when you enter the key sequence above. If you do not hear the rings, enter the code again.

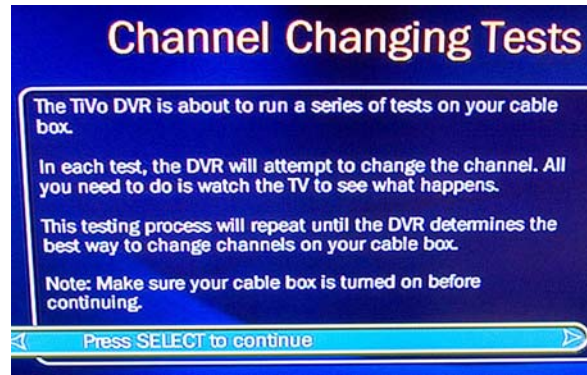

Step 9 On the Channel Changing Tests screen, you should now see the phrase “Press ENTER for advanced setup” at the bottom of the screen. Press the **ENTER** key on your remote.

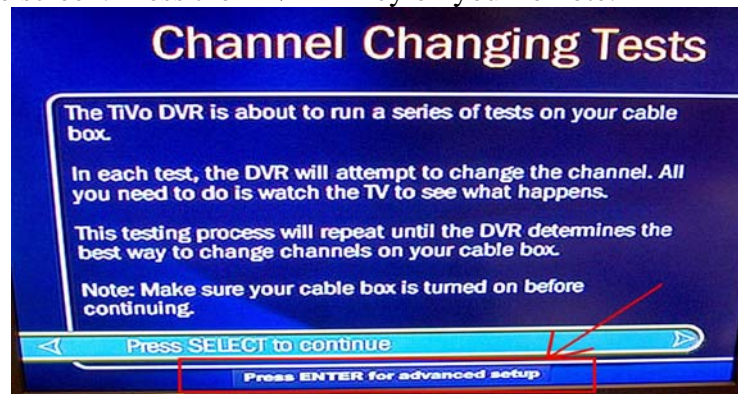


Step 10 You will now see the **Cable Channel Changing Advanced Setup** screen. Highlight **IR Code** and press SELECT.

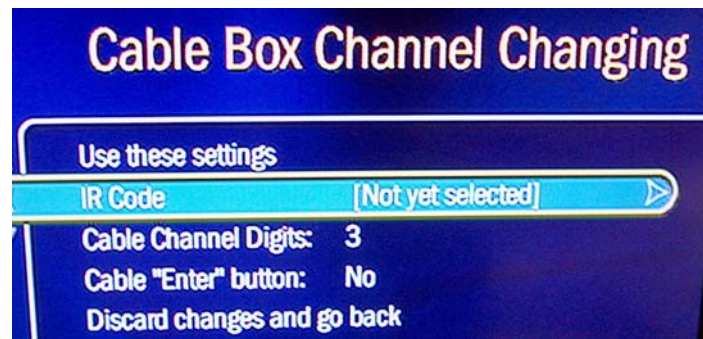


Step 11 Enter **10024** for **MAGNAVOX** IR Code, then press SELECT.

Or

Enter **00092** for **CENTURION** IR Code, then press SELECT.

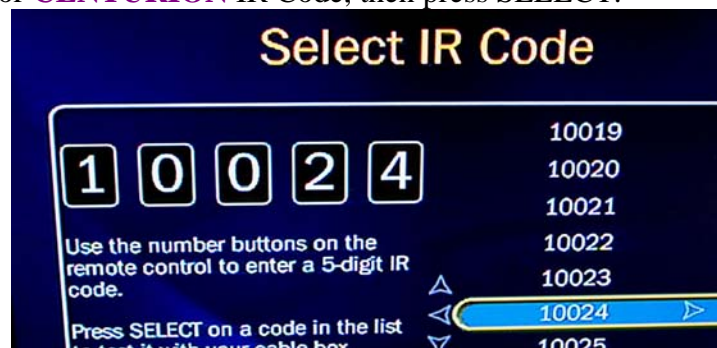

Step 12 On the next screen, select **10024-B** for MAGNAVOX or **00092-B** for CENTURION.

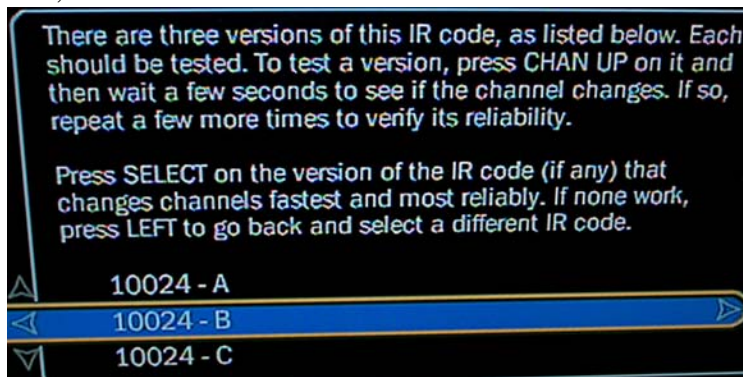

Step 13 Once you have selected a code, select **Use these settings**. You should now be able to change channels using IR control.

